


Pulley dimensions according to belt width

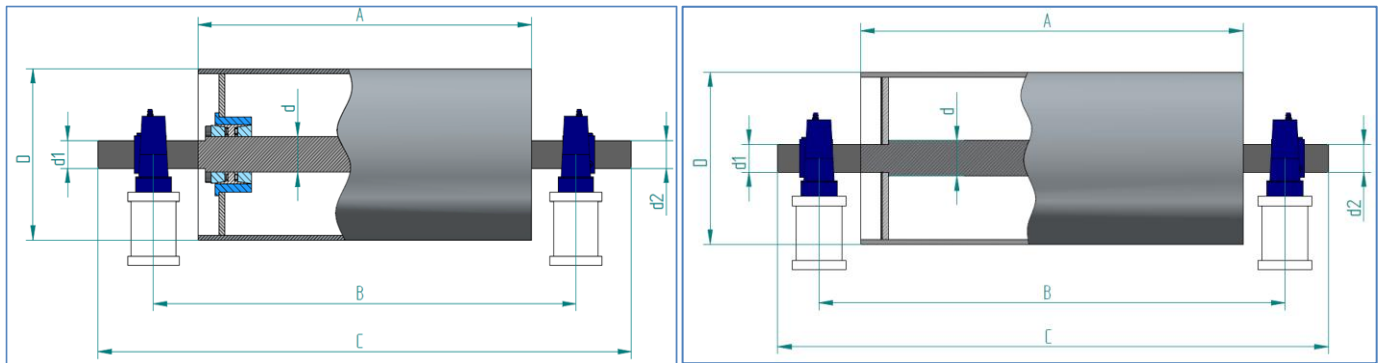

Shaft with clamping units

Welded shaft

IDLER/RETURN PULLEY										
BELT WIDTH	PULLEY TYPE	PERFORATE D BAR	D mm	A	d1	C	d	d2	T	B
400	RETURN	200	194	500	40	710	45	40	25	660
	RETURN	226,2	220	500	40	710	45	40	25	660
	RETURN	279	273	500	40	710	45	40	25	660
	RETURN	330	324	500	40	710	45	40	25	660
500	RETURN	200	194	600	40	810	45	40	25	760
	RETURN	226,2	220	600	40	810	45	40	25	760
	RETURN	279	273	600	40	810	45	40	25	760
	RETURN	330	324	600	40	810	45	40	25	760
	RETURN	406,4	400	600	40	810	45	40	25	760
650	RETURN	244,5	240	750	40	960	45	40	25	910
	RETURN	279	273	750	40	960	45	40	25	910
	RETURN	330	324	750	40	960	45	40	25	910
	RETURN	406,4	400	750	40	960	45	40	25	910
800	RETURN	330	324	950	40	1170	45	40	25	1120
	RETURN	406,4	400	950	40	1170	45	40	25	1120
1000	RETURN	330	324	1150	50	1400	55	50	30	1340
	RETURN	406,4	400	1150	50	1400	55	50	30	1340
1200	RETURN	330	324	1400	70	1750	80	70	35	1590
	RETURN	406,4	400	1400	70	1750	80	70	35	1590
1400	RETURN	330	324	1600	70	1950	80	70	40	1790
	RETURN	406,4	400	1600	70	1950	80	70	40	1790
1600	RETURN	330	324	1800	70	2150	80	70	45	1990
	RETURN	406,4	400	1800	70	2150	80	70	45	1990
1800	RETURN	406,4	400	2000	80	2390	90	80	45	2210
2000	RETURN	406,4	400	2200	90	2640	100	90	50	2430